


Iris U.S. Customer Service
800.323.9906
www.irisus.com



USIRISTC13



Made in the USA

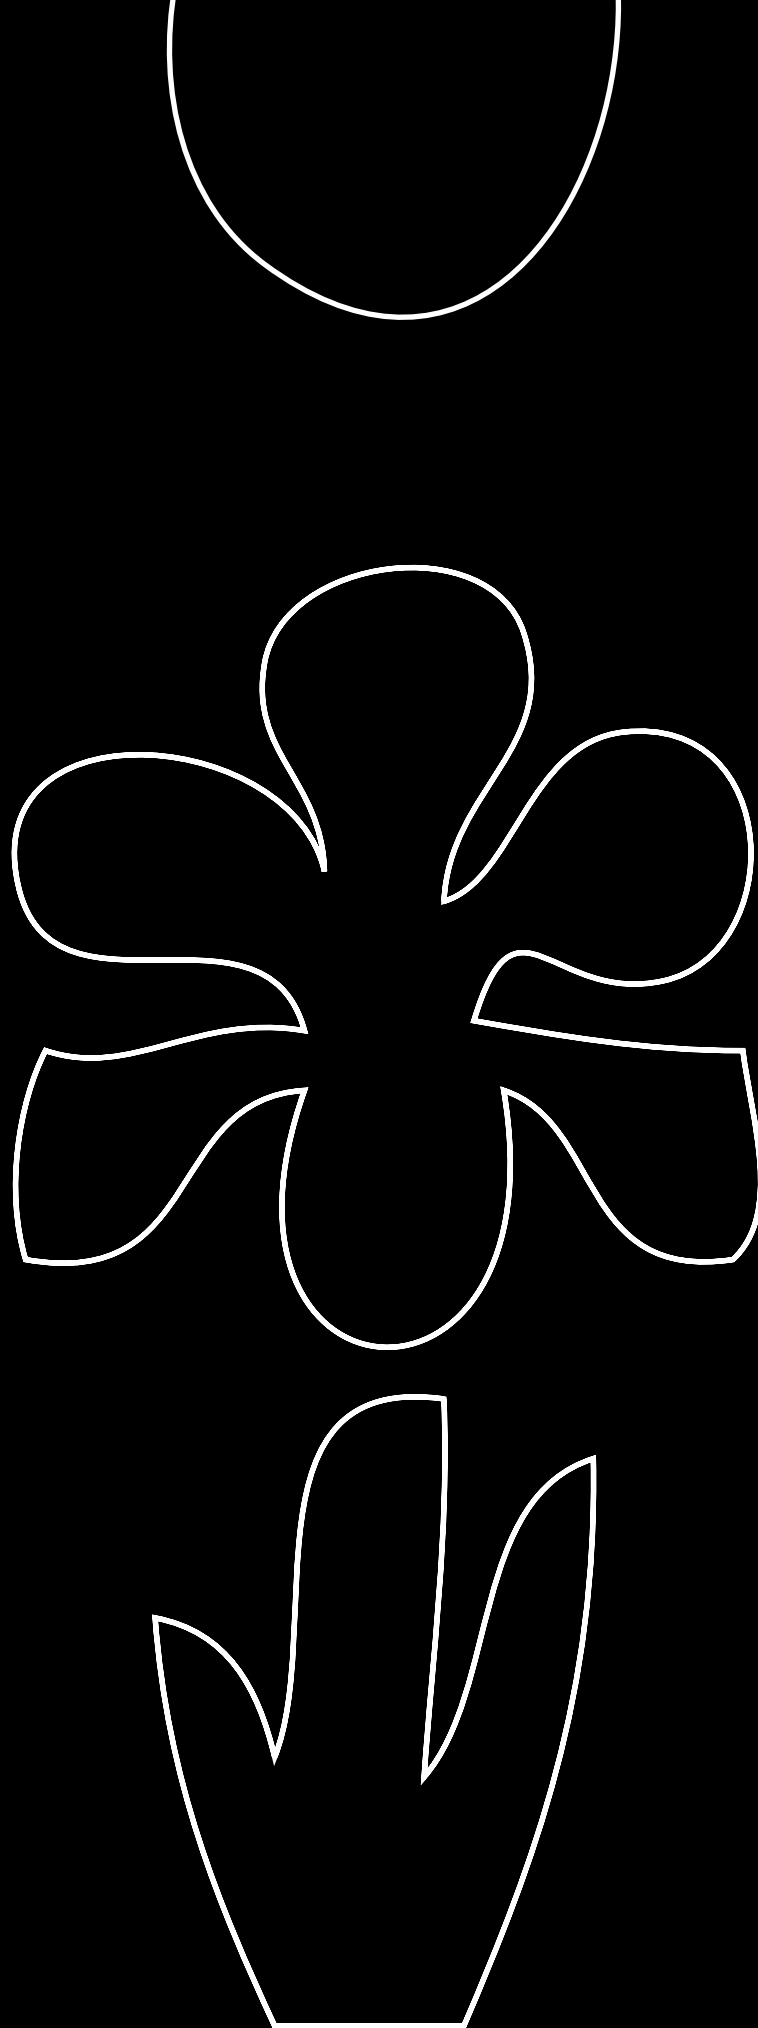

Travertini Al Contro





Argento Al Contro 24" x 48"

Travertini Al Contro Collection



Argento Al Contro

Travertini Al Contro Collection



Bianco Al Contro



Grigio Al Contro



Argento Al Contro



24 x 48



8 x 48



12 x 24



6 x 24

Bianco Al Contro

IRG2448112

IRG0848112

IRG1224112

IRG0624112

Grigio Al Contro

IRG2448113

IRG0848113

IRG1224113

IRG0624113

Argento Al Contro


IRG2448114

IRG0848114

IRG1224114

IRG0624114

Mosaics & Trim



Mosaic

2 x 2 mesh mounted on 12 x 12 sheet



Brick 03 Mosaic

2 x 6 mesh mounted on 12 x 12 sheet



Bullnose

4 x 24

Bianco Al Contro

IRG12M112P

IRG12MB3112

IRG424BT112

Grigio Al Contro

IRG12M113P

IRG12MB3113

IRG424BT113

Argento Al Contro

IRG12M114P

IRG12MB3114

IRG424BT114



Grigio Al Contro 24" x 48"



Travertini Al Contro Tech Specs

C1028
COF
 Dry ≥ 0.75
 Wet ≥ 0.60

Acutest
DCOF
 Wet ≥ 0.42

PHYSICAL PROPERTIES

Water Absorption
 Size
 Calibrated (non rectified)

Rectified

Bond Strength
 Deep Abrasion
 Hardness (Mohs scale)
 Frost Resistance (Freeze/Thaw)

Chemical Resistance
 Breaking Strength
 Coefficient of Friction (static)

TEST

ASTM C373

ASTM C499
 ASTM C499
 ASTM C485
 ASTM C485
 ASTM C502
 ASTM C499
 ASTM C499
 ASTM C485
 ASTM C485
 ASTM C502

ASTM C482
 ASTM C1243

ASTM C1026

ASTM C650
 ASTM C648
 ASTM C1028

INDUSTRY STANDARDS

0.5% Maximum

• Range of Thickness (inch) 0.040
 • Average Facial Dimension $\pm 0.50\%$
 • Warpage $\pm 75\%$ on any edge
 • Warpage $\pm 50\%$ on diagonal
 • Wedging $\pm 0.50\%$

• Range of Thickness (inch) 0.040
 • Average Facial Dimension $\pm 0.25\%$
 • Warpage $\pm 0.40\%$ on any edge
 • Warpage $\pm 0.40\%$ on diagonal
 • Wedging $\pm 0.25\%$

50 psi or greater
 $< 175 \text{ mm}^3$
 No requirement

No sample must show alterations to surface

No requirement
 250 lbf or greater
 No requirement

IRIS US RESULTS COLORED BODY

$\leq 0.1\%$

≤ 0.040
 $\leq \pm 0.50\%$
 $\leq \pm 0.75\%$
 $\leq \pm 0.50\%$
 $\leq \pm 0.50\%$

≤ 0.040
 $\leq 0.25\%$
 $\leq 0.40\%$
 $\leq 0.40\%$
 $\leq 0.25\%$

$> 200 \text{ psi}$
 $< 150 \text{ mm}^3$
 ≥ 7

No cracking
 or spalling occurred

Class A
 $\geq 350 \text{ lbf}$
 Per collection

Data taken from a representative colored body collection. Individual product testing can be conducted by request.

Coefficient of Friction: All values given are for matte or honed material. No values are given for polished material. Iris U.S. does not recommend polished surfaces in areas subject to exposure from grease, oil or water. (All values are based on ASTM C1028 and Acutest DCOF.)

Travertini Al Contro Packaging

PRODUCT	SIZE	BOX PIECES	BOX SF	PALLET BOXES	PALLET SF	THICKNESS	WEIGHT LB/SF
Floor & Wall Tile	24 x 48	4	31.668	20	633.36	8	3.83
	8 x 48	4	10.39	60	623.4	8	3.55
	12 x 24	8	15.751	32	504.032	8	3.55
	6 x 24	16	15.585	40	623.4	8	3.55
Mosaics 12 x 12 Sheet	2 x 6	5	4.896	-	-	8	3.55
	2 x 2	5	4.896	-	-	8	3.55
Bullnose	4 x 24	16	10.39	-	-	8	2.00

LB PER PIECE