


Iris U.S. Customer Service
800.323.9906
www.irisus.com



USIRISTC13



Made in the USA

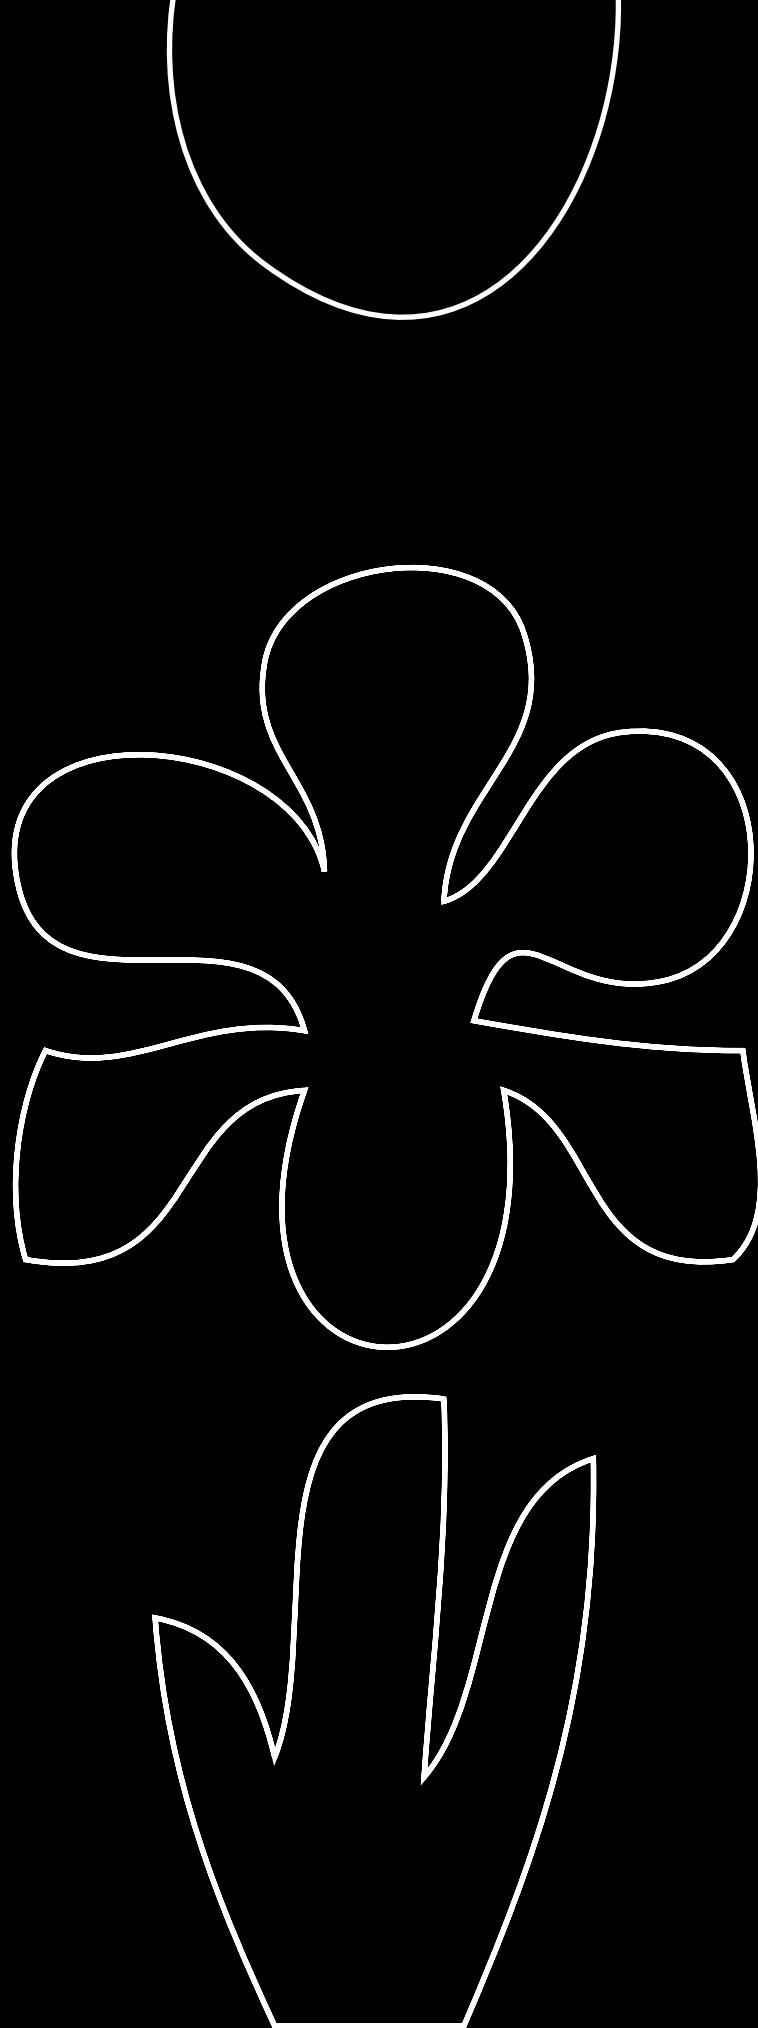

Travertini Al Contro





Argento Al Contro 24" x 48"

Travertini Al Contro Collection



Argento Al Contro

24"

Travertini Al Contro Collection



Bianco Al Contro



Grigio Al Contro



Argento Al Contro



24 x 48



8 x 48



12 x 24



6 x 24


| | |
|-------------------|------------|
| Bianco Al Contro | IRG2448112 |
| Grigio Al Contro | IRG2448113 |
| Argento Al Contro | IRG2448114 |

| |
|------------|
| IRG0848112 |
| IRG0848113 |
| IRG0848114 |

| |
|------------|
| IRG1224112 |
| IRG1224113 |
| IRG1224114 |

| |
|------------|
| IRG0624112 |
| IRG0624113 |
| IRG0624114 |

Mosaics & Trim



Mosaic

2 x 2 mesh mounted on 12 x 12 sheet



Brick 03 Mosaic

2 x 6 mesh mounted on 12 x 12 sheet



Bullnose

4 x 24

| | |
|-------------------|------------|
| Bianco Al Contro | IRG12M112P |
| Grigio Al Contro | IRG12M113P |
| Argento Al Contro | IRG12M114P |

| |
|-------------|
| IRG12MB3112 |
| IRG12MB3113 |
| IRG12MB3114 |

| |
|-------------|
| IRG424BT112 |
| IRG424BT113 |
| IRG424BT114 |



Grigio Al Contro 24" x 48"



Travertini Al Contro Tech Specs

C1028
COF
Dry ≥ 0.75
Wet ≥ 0.60

Acutest
DCOF
Wet ≥ 0.42

PHYSICAL PROPERTIES

Water Absorption
Size
Calibrated (non rectified)

Rectified

Bond Strength
Deep Abrasion
Hardness (Mohs scale)
Frost Resistance (Freeze/Thaw)

Chemical Resistance
Breaking Strength
Coefficient of Friction (static)

TEST

ASTM C373

ASTM C499
ASTM C499
ASTM C485
ASTM C485
ASTM C502
ASTM C499
ASTM C499
ASTM C485
ASTM C485
ASTM C502

ASTM C482
ASTM C1243

ASTM C1026

ASTM C650
ASTM C648
ASTM C1028

INDUSTRY STANDARDS

0.5% Maximum

• Range of Thickness (inch) 0.040
• Average Facial Dimension $\pm 0.50\%$
• Warpage $\pm 75\%$ on any edge
• Warpage $\pm 50\%$ on diagonal
• Wedging $\pm 0.50\%$

• Range of Thickness (inch) 0.040
• Average Facial Dimension $\pm 0.25\%$
• Warpage $\pm 0.40\%$ on any edge
• Warpage $\pm 0.40\%$ on diagonal
• Wedging $\pm 0.25\%$

50 psi or greater
< 175 mm³
No requirement
No sample must show alterations to surface
No requirement
250 lbf or greater
No requirement

IRIS US RESULTS COLORED BODY

$\leq 0.1\%$

≤ 0.040
 $\leq \pm 0.50\%$
 $\leq \pm 0.75\%$
 $\leq \pm 0.50\%$
 $\leq \pm 0.50\%$

≤ 0.040
 $\leq 0.25\%$
 $\leq 0.40\%$
 $\leq 0.40\%$
 $\leq 0.25\%$

> 200 psi
< 150 mm³
 ≥ 7
No cracking or spalling occurred
Class A
 ≥ 350 lbf
Per collection

Data taken from a representative colored body collection. Individual product testing can be conducted by request.

Coefficient of Friction: All values given are for matte or honed material. No values are given for polished material. Iris U.S. does not recommend polished surfaces in areas subject to exposure from grease, oil or water. (All values are based on ASTM C1028 and Acutest DCOF.)

Travertini Al Contro Packaging

| PRODUCT | SIZE | BOX PIECES | BOX SF | PALLET BOXES | PALLET SF | THICKNESS | WEIGHT LB/SF |
|-----------------------|---------|------------|--------|--------------|-----------|-----------|--------------|
| Floor & Wall Tile | 24 x 48 | 4 | 31.668 | 20 | 633.36 | 8 | 3.83 |
| | 8 x 48 | 4 | 10.39 | 60 | 623.4 | 8 | 3.55 |
| | 12 x 24 | 8 | 15.751 | 32 | 504.032 | 8 | 3.55 |
| | 6 x 24 | 16 | 15.585 | 40 | 623.4 | 8 | 3.55 |
| Mosaics 12 x 12 Sheet | 2 x 6 | 5 | 4.896 | - | - | 8 | 3.55 |
| | 2 x 2 | 5 | 4.896 | - | - | 8 | 3.55 |
| Bullnose | 4 x 24 | 16 | 10.39 | - | - | 8 | 2.00 |

LB PER PIECE